

POWERED BY **Dialog**

**Sealing material for solid electrolyte type fuel cell - comprises laminate of low softening pt. aluminosilicate glass and high softening pt., high-silica glass**  
**Patent Assignee: SUMITOMO CEMENT CO; TOKYO GAS CO LTD**

**Patent Family**

Patent Number	Kind	Date	Application Number	Kind	Date	Week	Type
JP 4342439	A	19921127	JP 91111711	A	19910516	199302	B
JP 94078176	B2	19941005	JP 91111711	A	19910516	199438	

**Priority Applications (Number Kind Date):** JP 91111711 A ( 19910516)

**Patent Details**

Patent	Kind	Language	Page	Main IPC	Filing Notes
JP 4342439	A		7	C03C-008/24	
JP 94078176	B2		7	C03C-008/24	Based on patent JP 4342439

**Abstract:**

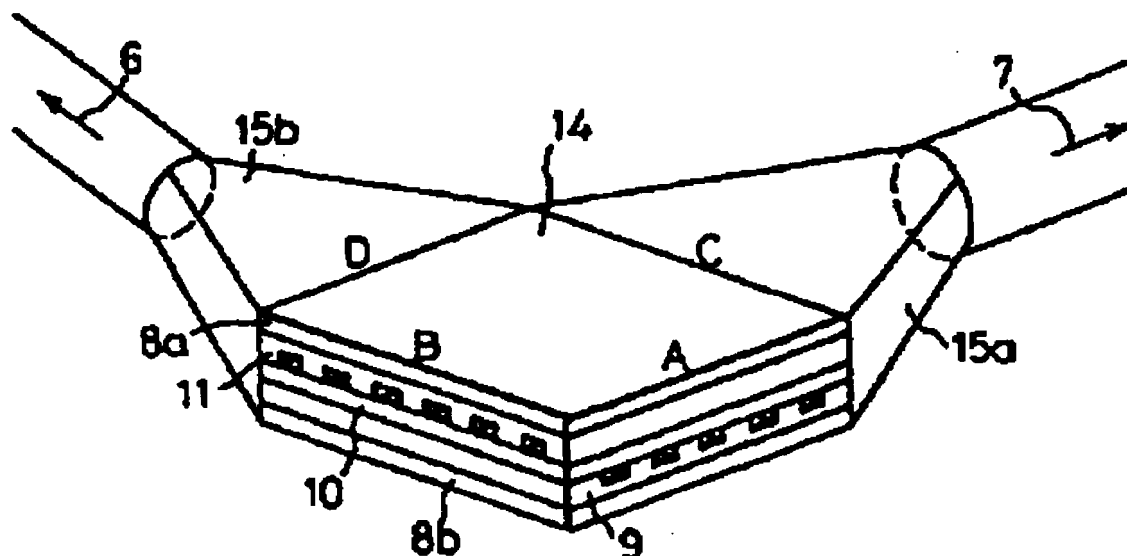
JP 4342439 A

Material comprises a laminate of at least one piece of low-softening pt. glass thin film comprising aluminosilicate glass contg. silica, and alumina, having glass softening pt. of 770-950 deg.C, and at least one piece of high-softening pt. glass thin film comprising high-silica glass contg. silica and alumina, having glass softening pt. of 1450-1550 deg.C.

The fuel cell is sealed by sealing the jointing part of the cell body unit and manifold for gas pass-way while the sealing material is softening, and cooling to solidify the softened sealing part.

USE - For sealing solid electrolyte type fuel cells at lower temps.

Dwg.3/3

**平板状燃料電池単電池とガス給排気用マニホールドとの封着連結**

14…燃料電池単電池

15a…燃料ガス排出マニホールド

15b…空気排出用マニホールド

A, B, C, D…燃料電池単電池の側面

Derwent World Patents Index

© 2004 Derwent Information Ltd. All rights reserved.

Dialog® File Number 351 Accession Number 9320506